
LED-QME 625


Surface-mounted or
recessed luminaire
Surface light square

LED-QME 625

Surface-mounted/recessed luminaire,
surface light, square



PICTURES

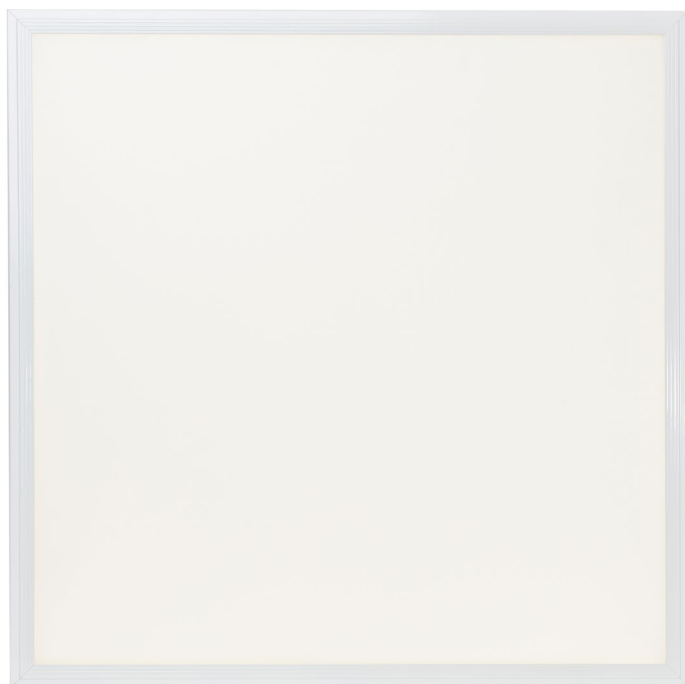

LED-QME 625

Surface-mounted/recessed luminaire,
surface light, square



BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS



LED-SurfaceLight | Plain and neat


Perfect symmetry: An elegant lamp, square and flat, for interior use. A matt-polished cover and a light intensity that leaves nothing to be desired. Surface Light. Very pleasant.

Features

- For hotels, offices, showrooms, laboratories and production sites
- Perfect homogeneous lighting
- Glare-free
- LED light panel with a white aluminium frame, covering opal PMMA sheet
- Optional: dimmable and/or suitable for emergency lighting systems
- Optional: mounting or built-in frame

DIMENSIONS [L X W X H]	620 x 620 x 15 mm
POWER CONSUMPTION	40 W
LUMINOUS FLUX	Module efficiency + nominal luminous flux 90 lm/W 3,600 lm at 40 W
RESOURCE	Converter
SERVICE LIFE	LED 50,000 hours at 70% of mean luminous flux
COLOUR TEMPERATURE	white standard 4,000 Kelvin optional 3,000 Kelvin
CRI	CRI > 90
IP RATING	IP44 Protection class III, SELV, F, CE
LUMINAIRE HOUSING	Aluminium white powder-coated covering opal PMMA sheet
CONVERTER	Mains voltage 110–240 V Overload protection Overtemperature protection Short-circuit protection Dimming adjustable for DC-mode
OPTIONS	Mounting frame (LxWxH): 625x625x50 mm Built-in frame UGR < 19 glare-free for office use Suitable for emergency lighting systems DALI, 1–10 V Touch-Dim

LED SURFACE LIGHT | 1 X LED, 40W, 3,600 lm

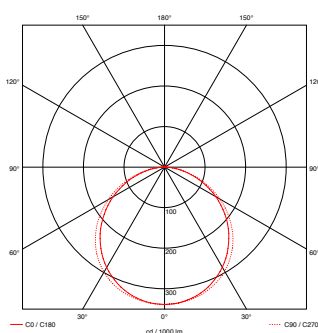

TTC Timmler Technology GmbH
Christian-Schäfer-Straße 8
D-53881 Flamersheim [Cologne/Bonn]
T +49 2255 9212-00
F +49 2255 9212-99
E info@ado-lights.com
I www.ado-lights.com
www.led-luc.com

ADO  [®]
by TTC Timmler Technology

