
LED-LINARGO

Pendant/Recessed Luminaire

ADO ®
by TTC Timmler Technology

LED-LINARGO

Pendant/Recessed Luminaire


ADO *Lights*

PICTURES



LED-LINARGO

Pendant/Recessed Luminaire



BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS





Linargo | Simplistic Luminaire

A very simplistic design mated with the exact level of brightness. LED Linargo is available as a recessed luminaire, which thanks to its modular design can be strung together to form a continuous light band, and also as a pendant luminaire. Ideal for corridors, offices or above counter tops.

Features

- For hotels, offices, showrooms, laboratories and production sites
- Suitable for emergency lighting systems acc. to EN50172
- Narrow light colour tolerances
- Glare suppression by satinised PMMA sheet
- Perfect homogeneous light spread, even if several LED modules are strung together
- Clamps for quick and easy wiring from one LED module to the next
- The light colours are dimmable and controllable using DMX

| | |
|-------------------------------|--|
| DIMENSIONS [L X W X H] | LUMINAIRE [STANDARD]: 1,690 x 38 x 80 mm Variable length |
| POWER CONSUMPTION | 51 W [at 1,690 mm length] |
| LUMINOUS FLUX | Module efficiency up to 143 lm/W Luminous flux 6,910 lm Nominal luminous flux 7,293 lm |
| LIGHT BEAM ANGLE | 120° |
| SERVICE LIFE | LED + EVG 50,000 hours at 70% of mean luminous flux |
| COLOUR TEMPERATURE | White 3,000/4,000 Kelvin |
| CRI | CRI > 85 Narrow colour tolerance MacAdam Step 3 |
| NORM/PERFORMANCE | UGR < 19 L65 < 1,500 cd/m ² according to EN12464-1:2011 |
| CONTROL INTERFACE | DALI DEVICE Type 6, DSI, switch DIM with memory function, corridorFUNCTION |
| IP RATING | IP40 |
| LUMINAIRE HOUSING | Aluminium anodised, black anodised or RAL powder-coated PMMA sheet, satinised |
| MOUNTING | Stainless steel cable and translucent supply line [Pendant]; Spring clips [Recessed] |
| CONVERTER | Operating voltage 220–240 AC Overload protection Overtemperature protection Short-circuit protection Dimming adjustable for DC-mode Suitable for emergency lighting systems according to EN50172 |
| OPTIONS | Pendant luminaire: direct/indirect separately switchable Emergency light function |
| WEIGHT | 3.2 kg |

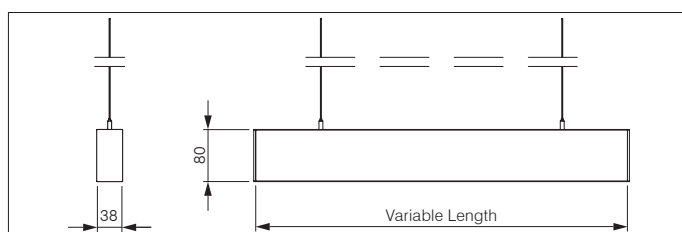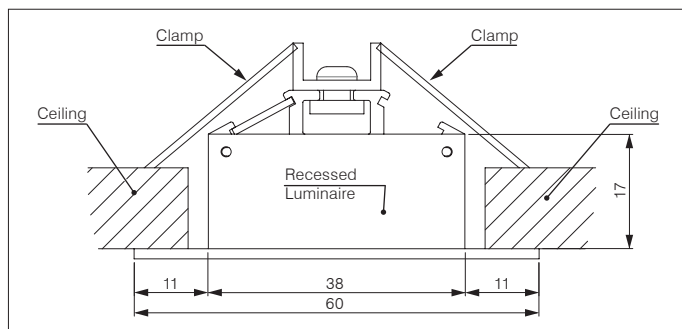

TTC Timmler Technology GmbH
Christian-Schäfer-Straße 8
D-53881 Flammersheim [Cologne/Bonn]
T +49 2255 9212-00
F +49 2255 9212-99
E info@ado-lights.com
I www.ado-lights.com
www.led-luc.com



by TTC Timmler Technology

