

LED-LIGHTTILE

Recessed Ground Luminaire


ADO  [®]
by TTC Timmler Technology

LED-LIGHTTILE

Recessed Ground Luminaire



PICTURES

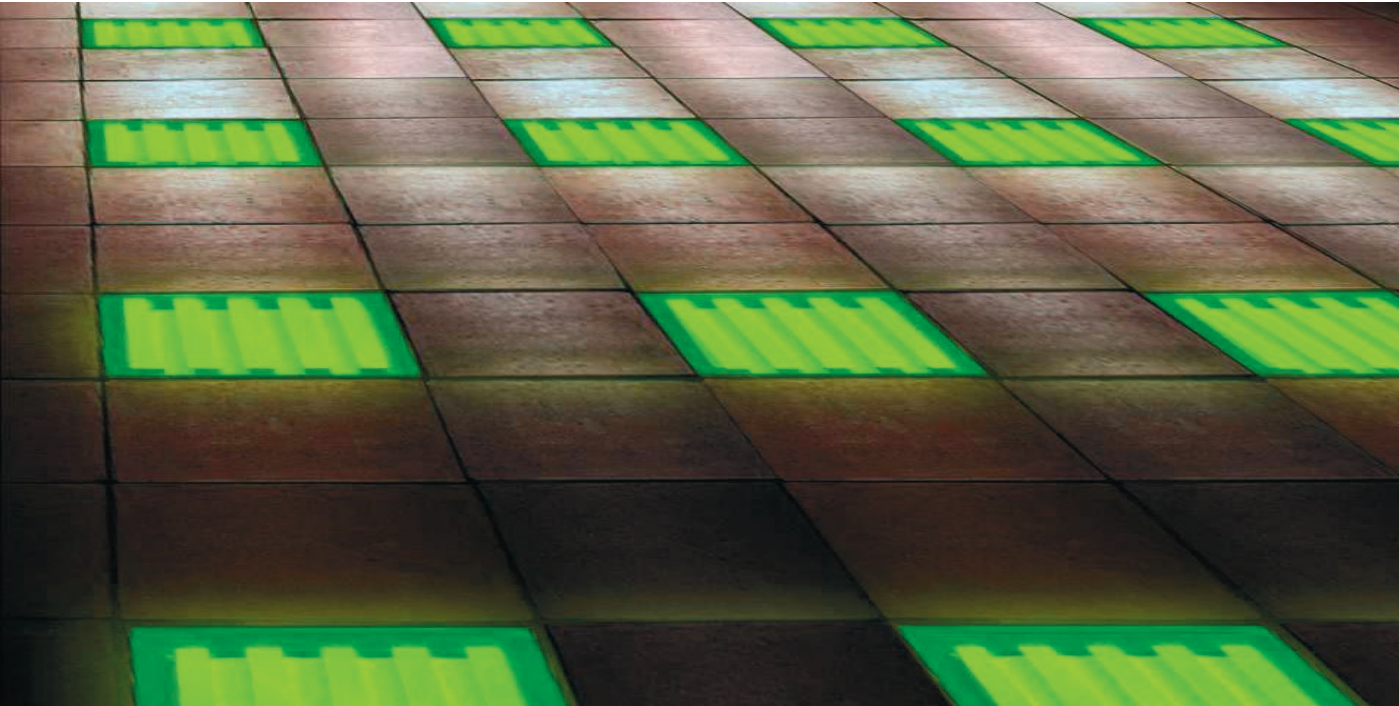

LED-LIGHTTILE

Recessed Ground Luminaire



BASE INFORMATION AND TECHNICAL DRAWINGS



LED-LightTile | Glare-free Illumination

The LED-LightTile allows a glare-free illumination of façades and gardens, but may just as well be used for way-finding.

Features

- For public spaces, private residences, mansions, parcs, gardens, churches, castles, historic buildings
- Housing made of stainless steel to be used in exterior
- Weather-resistant
- Printable non-slip surface
- Glare-free
- Integration in interactive lighting systems, interactive integration in existing media lighting systems

DIMENSION [L X B X H]

300 x 300 x 120 mm
600 x 600 x 120 mm
Special sizes upon request

POWER CONSUMPTION

MONOCHROME/WHITE:
300: 6 W | 12 W | 24 W
600: 12 W | 24 W | 48 W
RGB/MULTICOLOUR:
300: 5 W | 10 W | 20 W
600: 10 W | 20 W | 40 W

LUMINOUS FLUX

Module efficiency 100 lm/W

OPERATING VOLTAGE

24V DC

LIGHT BEAM ANGLE

diffuse illuminating

SERVICE LIFE

LED + EVG 50,000 hours at
70% of mean luminous flux

COLOUR TEMPERATURE

MONOCHROME/WHITE:
2,700/3,000/4,000 Kelvin
optional RGB

CRI

CRI > 85

CONTROL INTERFACE

With ballast compatible to any interface
e.g. DMX512, DALI, EIB etc.

IP RATING

IP67

CERTIFICATES

CE, RoHs

LUMINAIRE HOUSING



Stainless steel V4A

COVERING

VSG-Safety glass, drive-over design for
wheel loads up to 1.5 t

CONVERTER

Overload protection
Overtemperature protection
Short-circuit protection

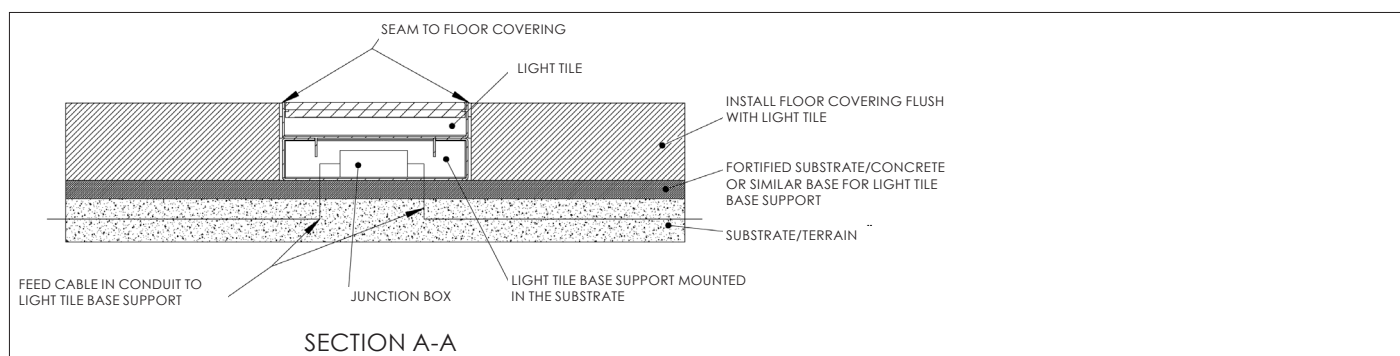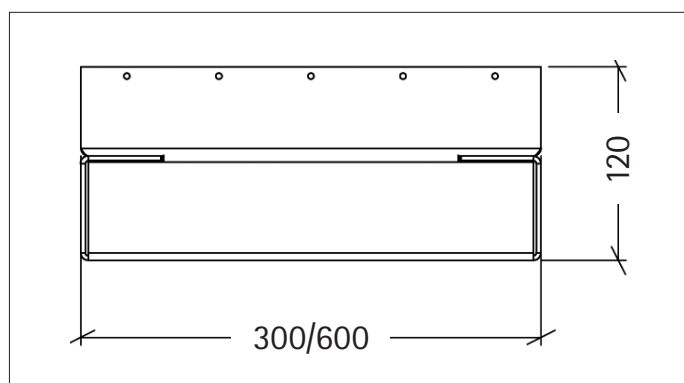

TTC Timmler Technology GmbH
Christian-Schäfer-Straße 8
D-53881 Flammersheim [Cologne/Bonn]
T +49 2255 9212-00
F +49 2255 9212-99
E info@ado-lights.com
I www.ado-lights.com
www.led-luc.com



by TTC Timmler Technology

