LED-AROUND

Standing Luminaire



LED-AROUND Standing Luminaire



PICTURES
















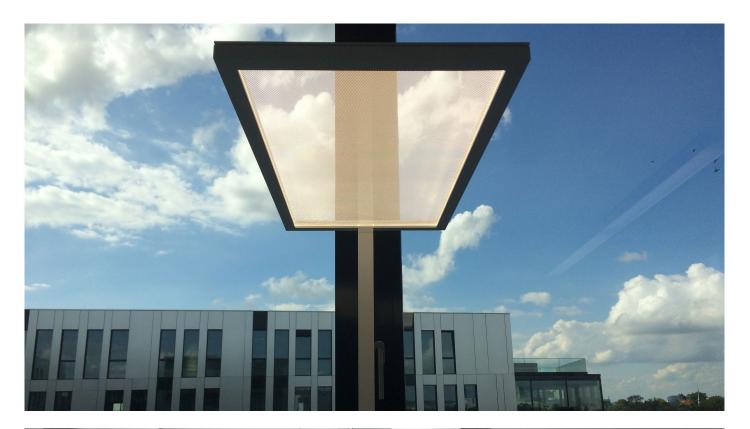



LED-AROUND

Standing Luminaire



BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS















LED-Around | Light in all directions

Combining sophistication and efficiency. Upward and downward light radiation. Ensures homogeneous, glare-free illumination. Fully transparent when switched off. LED Around is useful everywhere, in offices and administrative buildings, in show rooms and private residences.

As a freestanding luminaire, LED Around is a true all-rounder: it can provide radiant, glare-free but still subdued lighting. A captivating product - thanks to its minimalist design and high-quality finish.

Features

- → For offices, showrooms, hotels, laboratories, shop floors and private residences
- → Narrow light colour tolerances
- → Direct/indirect light extraction; optional direct light extraction wth reflector
- Perfect homogeneous light spread
- Glare-free
- → Steplessly dimmable and suitable to VDU workstations

DIMENSIONS [LXWXH]

HEAD: 610 x 320 x 20 mm

BASE: 420 x 320 mm TOTAL HEIGHT: 1.950 mm

POWER CONSUMPTION max. 85 W

LUMINOUS FLUX Module efficiency 196 lm/W

> Direct/indirect 6,997 lm/4.665 lm At 100 % direct 11,662 lm Nominal luminous flux 16,660 lm

OPERATING VOLTAGE 230 V

SEVICE LIFE LED 50.000 hours at 70% of mean luminous flux

COLOUR TEMPERATURE White | 3,000/4,000 Kelvin

CRI CRI > 85

Narrow colour tolerance MacAdam Step 3

NORM/PERFORMANCE UGR < 19 | L65 < 1,500 cd/m²

according to EN 12464-1:2011

IP RATING IP20

LUMINAIRE HOUSING HEAD: Aluminium anodised or black anodised

Aluminium anodised or black anodised

BASE PLATE

Aluminium anodised or black anodised;

weighted down with steel plate

CONVERTER Overload protection


> Overtemperature protection Short-circuit protection

Dimming adjustable for DC-mode

OPTIONS Presence detector

> Cluster switches Daylight sensor

WEIGHT 18 kg

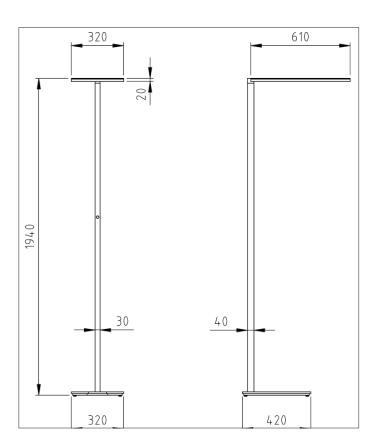

Subject to technical changes · Issued 08/2018

TTC Timmler Technology GmbH Christian-Schäfer-Straße 8 D-53881 Flamersheim [Cologne/Bonn]

T +49 2255 9212-00

F +49 2255 9212-99

E info@ado-lights.com

I www.ado-lights.com www.led-luc.com



