


# LED-LightLine

Type LLF 20.40

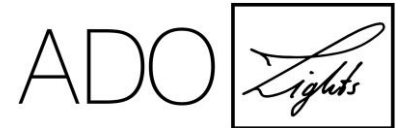

by TTC Timmler Technology GmbH  
Christian-Schäfer-Str. 8 | 53881 Flamersheim  
T +49 2255 921-200 | F +49 2255 921-500  
info@ado-lights.de | www.ado-lights.de

|                           |  |                     |   |
|---------------------------|--|---------------------|---|
| <b>dimensions [w x h]</b> | light line 20 x 40 mm<br>incl. mounting profile  | <b>converter</b>    | external DALI driver  |
| <b>power consumption</b>  | 19.2 W/m<br>24 VDC   | <b>mounting</b>     | aluminum mounting profile   |
| <b>luminous flux</b>      | 1.200 lm/m   | <b>certificates</b> | CE, RoHs  |
| <b>beam angel</b>         | diffuse light output   | <b>other</b>        | connection cable 1m with<br>plug IP67   |
| <b>cover</b>              | opaque polyethurane seal for homogeneous<br>illumination without dark spots at the<br>junction, polyethurane seal conform to RoHS<br>and WEEE, UV resistant, | <b>options</b>      | curved version<br>light color RGB / RGB+W<br>pendant version with<br>stainless steel suspension |
| <b>service life</b>       | LED: 50.000 hours at 70%<br>of mean luminous flux  | <b>weight</b>       | 0,86 kg/m   |
| <b>color temperature</b>  | white 3.000, 4.000 or 5.700 Kelvin   |                     |   |
| <b>CRI</b>                | CRI > 85   |                     |   |
| <b>control interface</b>  | with external driver DALI DEVICE Type 6,<br>DSI, switch DIM with memory function   |                     |   |
| <b>IP rating</b>          | IP68   |                     |   |
| <b>luminaire housing</b>  | aluminum natural anodized  |                     |   |

